


2 DIN 6912

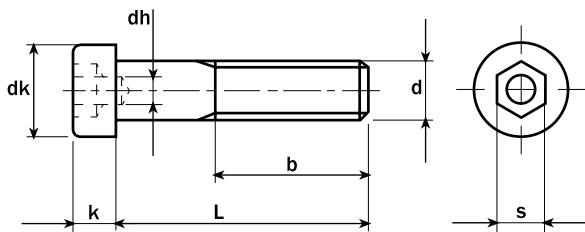

Hexagon socket head cap screws with centre hole and low head
 Vis à tête cylindrique réduite à six pans creux avec trou de guidage

Tornillos con cabeza cilíndrica baja con hueco hexagonal y centrador

d	M4	M5	M6	M8	M10	M12	M14	M16	
P	0,7	0,8	1	1,25	1,5	1,75	2	2	
b ⁽¹⁾	1	14	16	18	22	26	30	34	38
	2	-	-	-	-	32	36	40	44
dk	7	8,5	10	13	16	18	21	24	
dh	2	2,5	3	4	5	6	7	8	
k	2,8	3,5	4	5	6,5	7,5	8,5	10	
s	3	4	5	6	8	10	12	14	

L\d: Peso/Weight 1000 ud. kg

10	1,300	2,200	3,600					
12	1,500	2,500	3,900	7,700				
16	1,900	3,100	4,500	8,800	15,50	22,30		
20	2,300	3,700	5,200	10,20	17,90	25,50	37,90	52,50
25	2,700	4,400	6,200	12,50	20,20	29,50	42,50	56,50
30	3,200	5,100	7,300	14,00	22,00	32,50	48,00	63,00
35	3,400	5,800	8,300	15,70	25,50	36,50	53,00	69,70
40	4,200	6,600	9,500	17,50	28,50	40,00	58,00	78,70
50	5,200	7,300	11,50	21,50	34,80	48,00	69,50	91,50
60		9,000	13,60	25,30	40,30	57,00	82,00	107,00
70			15,70	29,10	46,00	65,00	92,50	122,00
80				32,80	52,50	72,00	104,00	140,00
90					57,80	80,00	116,00	154,00
100						88,00	127,00	169,00
110							139,00	183,00
120							151,00	198,00
130								212,00
140								226,00

b) 1) $L \leq 125$ mm. 2) 125 mm $< L \leq 200$ mm.

CALIDADES/GRADES:

4.6	4.8	5.6	5.8	6.8	8.8	10.9	12.9	A2	A4
					●	●		●	●

