


# 7 DIN 7504-K

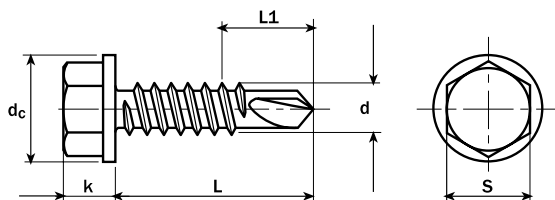

Self-drilling hexagon head screws with collar  
 Vis autoperceuses à tête hexagonale à embase cylindrique

## Tornillos autotaladrantes de cabeza hexagonal con collarín

d	ST3,5	ST4,2	ST4,8	ST5,5	ST6,3
<b>P</b>	1	1,4	1,6	1,8	1,8
<b>dc</b>	8,3	8,8	10,5	11	13,2
<b>k (max)</b>	3,45	4,25	4,45	5,45	6,45
<b>s</b>	5,5	7	8	8	10
<b>L1</b>	6	7	9	11	12
<b>Nr. ISO</b>	6	8	10	12	14

L\d: Peso/Weight 1000 ud. kg

9,5	0,740	1,290	1,680		
13	0,920	1,540	2,020	3,64	
16	1,080	1,760	2,320	4,01	8,500
19	1,230	1,970	2,610	4,40	9,400
22	1,380	2,190	2,890	4,78	10,30
25	1,540	2,400	3,190	5,17	11,20
32		2,910	3,880	6,06	13,30
38			4,460	6,82	15,10
45			5,160	7,10	17,20
50			5,660	7,98	18,70

### CALIDADES/GRADES:

ST	ST Acero Cementado/Case hardened	A2	A4
----	----------------------------------	----	----